

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



10/521044



(43) International Publication Date
18 December 2003 (18.12.2003)

PCT

(10) International Publication Number
WO 03/103534 A2

- (51) International Patent Classification⁷: A61F
- (21) International Application Number: PCT/US03/18638
- (22) International Filing Date: 11 June 2003 (11.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/388,113 11 June 2002 (11.06.2002) US
60/431,174 4 December 2002 (04.12.2002) US
- (71) Applicant and
(72) Inventor: ABOUL-HOSN, Walid [US/US]; 4625
Chicago Avenue, Fair Oaks, CA 95628 (US).
- (74) Agent: SPANGLER, Jonathan; 2875 Kalmia Place, San
Diego, CA 92104 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: PERCUTANEOUSLY INTRODUCED BLOOD PUMP AND RELATED METHODS

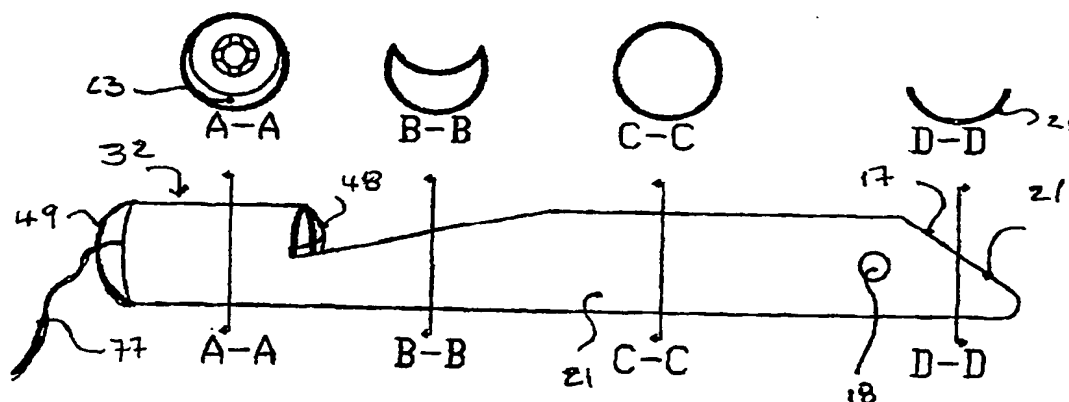

(57) Abstract: The present invention involves a blood pump having a pump housing with an internally disposed rotor that collec-
tively provide a dual inflow capability which prevents thrombus formation and reduces hemolysis during use.

WO 03/103534 A2